


Superior product for special locations  
Less Corrosion Long Life Better Appearance.



## STAINLESS STEEL CONDUIT PIPE

### 1. High Resistance to Corrosion

Stainless steel (SUS304) construction ensures extreme protection against rust in corrosive areas, such as food processing lines, chemical plants, water treatment plants, seashore plants, etc.

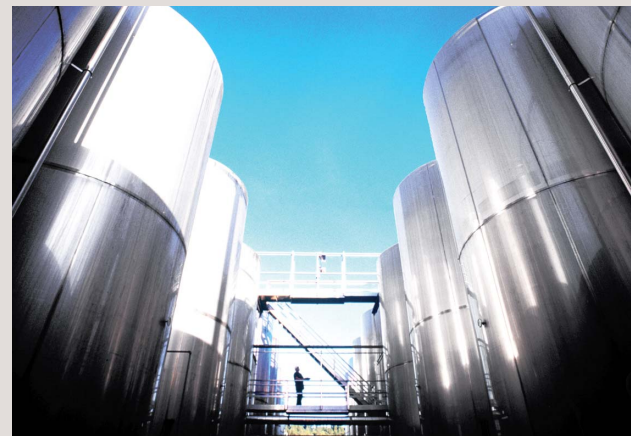

### 2. Conforming to IMC Conduit

Internal diameter and length conform to IMC requirements. Can be combined with steel conduit for a more flexible, reliable wiring installation in a variety of applications.

Stainless conduit fittings help form a complete, professional wiring system.

### 3. Long Lifetime

Conduit systems must remain in a good condition wherever they are installed. Stainless steel conduit delivers a long lifetime and requires little maintenance especially in high altitude installations.

### 4. Brilliant Appearance

Stainless steel conduit polished to a bright finish for a superior appearance. This ensures an attractive appearance of special importance to food processing lines.

### Stainless Steel Conduit Pipes with one coupling on one end



Item No.	Nominal Size (inch)	Outside Diameter (mm)	Wall Thickness (mm)	Length (mm)	Weight (kg/Pce)	Bundle (Pcs)
DWSM 012	1/2"	21.1	2.1	3,030	3.08	10
DWSM 034	3/4"	26.4	2.1	3,030	3.95	10
DWSM 100	1"	33.6	2.8	3,025	6.56	5
DWSM 114	1-1/4"	42.2	2.8	3,025	8.39	3
DWSM 112	1-1/2"	48.3	2.8	3,025	9.69	3
DWSM 200	2"	60.3	2.8	3,025	12.29	1
DWSM 300	3"	88.9	4.0	3,010	26.23	1
DWSM 400	4"	114.2	4.0	3,005	34.12	1

### Stainless Steel Conduit Fittings

#### Couplings



Item No.	Nominal Size (inch)	Weight (Kg/pc)	Inner Packing (Pcs)	Outer Box (Pcs)
DFSM 11012	1/2"	0.053	25	50
DFSM 11034	3/4"	0.068	10	20
DFSM 11100	1"	0.119	10	20
DFSM 11114	1-1/4"	0.151	10	10
DFSM 11112	1-1/2"	0.190	5	5
DFSM 11200	2"	0.281	3	6
DFSM 11300	3"	0.728	5	5
DFSM 11400	4"	1.019	5	5

#### Locknuts



Item No.	Nominal Size (inch)	Weight (Kg/pc)	Inner Packing (Pcs)	Outer Box (Pcs)
DFSM 12012	1/2"	0.004	50	-
DFSM 12034	3/4"	0.006	50	-
DFSM 12100	1"	0.013	50	-
DFSM 12114	1-1/4"	0.018	50	-
DFSM 12112	1-1/2"	0.022	30	-
DFSM 12200	2"	0.029	30	-
DFSM 12300	3"	0.063	10	-
DFSM 12400	4"	0.076	10	-

#### Normal Bends



Item No.	Nominal Size (inch)	Weight (Kg/pc)	Inner Packing (Pcs)	Outer Box (Pcs)
DFSM 13012	1/2"	0.284	1	10
DFSM 13034	3/4"	0.434	1	8
DFSM 13100	1"	0.872	1	6
DFSM 13114	1-1/4"	1.409	1	-
DFSM 13112	1-1/2"	1.860	1	-
DFSM 13200	2"	2.572	1	-
DFSM 13300	3"	7.419	1	-
DFSM 13400	4"	13.945	1	-

#### Saddles



Item No.	Nominal Size (inch)	Weight (Kg/pc)	Inner Packing (Pcs)	Outer Box (Pcs)
DFSM 16012	1/2"	0.011	25	-
DFSM 16034	3/4"	0.013	25	-
DFSM 16100	1"	0.025	25	-
DFSM 16114	1-1/4"	0.028	25	-
DFSM 16112	1-1/2"	0.045	15	-
DFSM 16200	2"	0.055	5	-
DFSM 16300	3"	0.113	5	-
DFSM 16400	4"	0.140	5	-